

# PCE-5B06V-04A1E (PCE-7B06V-04A1E) Backplane: 6-slot BP for 2U Chassis, 1 PICMIG 1.3, 1 PCIe, 4 32-bit PCI

## Startup Manual

### Packing list

Before you begin installing your card, please make sure that the following materials have been shipped:

- One 2 Ports USB Cable p/n: 1700002204
- PCE-5B06V-04A1E (PCE-7B06V-04A1E) Startup Manual
- M4\*6\*0.7 Round Screws (5 pcs) p/n: 1939000410
- 2 years quality warranty card p/n: 2190000902

If any of these items are missing or damaged, contact your distributor or sales representative immediately.

### Specifications

#### Standard Functions

- **PICMIG 1.3 slots:**  
PCE-7B06V-04 supports PCE-7xxx CPU boards  
PCE-5B06V-04 supports PCE-5xxx CPU boards
- **PCIe slots:**  
PCE-7B06V-04 supports one PCIe x8 slot  
PCE-5B06V-04 supports one PCIe x16 slot
- **32-bit PCI:**  
Four 32-bit / 33 MHz PCI slot
- **USB (2.0) support:** Four Universal Serial Bus ports to Backplane

#### Mechanical and Environment

- **Dimensions:** 80.01 x 325 mm
- **Power supply voltage:** +12 V, +5 V, -12 V, -5 V, +5 V SBY, +3.3 V
- **Power requirements:** Refer to the CPU Board, add-on Card & Peripherals
- **Operating temperature:** 0 ~ 60° C
- **Weight:** 0.211 kg (weight of board)

For more information on this and other Advantech products, please visit our website at:

<http://www.advantech.com>

<http://www.advantech.com/eplatform>

For technical support and service, please visit our support website at:

<http://www.advantech.com/support>

This manual is for the PCE-5B06V-04A1E (PCE-7B06V-04A1E) series Rev. A1

Part No. 200K5B0621  
Printed in China

2nd Edition  
August 2012

PCE-5B06V-04A1E (PCE-7B06V-04A1E) Backplane: 6-slot BP for 2U Chassis,  
1PICMIG 1.3, 1 PCIe, 4 32-bit PCI

## Connectors and Jumpers

The table below lists the function of each of the jumpers and connectors:

### Connectors

Label	Function
SHBA1~SHBD1	PICMG1.3 CPU board slot
PPCIE1	PCE-5B06V-04: PCIe x 16 slot PCE-7B06V-04: PCIe x 8 slot
PPC1~PPC14	32 Bit / 33 MHz PCI Bus slot
EATXPWR1	ATX2.0 24-pin Power Connector
EATX12V1	ATX 12V Auxiliary 8-pin Power Connector
ATX12V1	ATX 12V 4-pin Power Connector
VOLT1	Alarm board / CMM Power Connector
FAN1	FAN Connector
FAN2	FAN Connector
FAN3	FAN Connector
FAN4	FAN Connector
FANDEC1	FAN speed detector Connector
SMBUS1	SMBus Connector for chassis monitor
SMBUS2	SMBus Connector for chassis monitor
KBMS1	External Keyboard/Mouse Connector
KBMS2	External Keyboard/Mouse Connector
JFP1	Power and Reset button Connector
IPMB1	IPMB Connector
USB12	Two USB port pin header
USB34	Two USB port pin header

### Jumpers

Label	Function
PSON1	ATX / AT Mode Selection

### EATXPWER1

Pin	Name
1	3.3 V
2	3.3 V
3	GND
4	5 V
5	GND
6	5 V
7	GND
8	Power OK
9	5 V SBY
10	12 V
11	12 V
12	3.3 V
13	3.3 V
14	-12 V
15	GND
16	PSON#
17	GND
18	GND
19	GND
20	-5 V
21	-5 V
22	5 V
23	5 V
24	GND

### ATX12V1

Pin	Name
1	GND
2	GND
3	12 V
4	12 V

### EATX12V1

Pin	Name
1	GND
2	GND
3	GND
4	GND
5	12 V
6	12 V
7	12 V
8	12 V

### VOLT1

Pin	Name
1	5 V SBY
2	GND
3	GND
4	-5 V
5	5 V
6	3.3 V
7	-12 V
8	12 V

### FAN1~FAN4

Pin	Name
1	GND
2	12 V
3	FANIO1~FANIO4

### FANDEC1

Pin	Name
1	FANIO1
2	FANIO2
3	FANIO3
4	FANIO4

### SMBUS1~SMBUS2

Pin	Name
1	5 V
2	C-SMBBUS
3	C-SMBDAT
4	GND

### KBMS1~KBMS2

Pin	Name
1	KBCLK
2	KBDAT
3	MSDAT
4	GND
5	5 V
6	MS_CLK

**IPMB1**

Pin	Name
1	IPMB_CLK
2	IPMB_DAT
3	GND

**USB12**

Pin	Name
1	USBV0
2	USBV0
3	USBD0-
4	USBD1-
5	USBD0+
6	USBD1+
7	GND
8	GND
9	Null
10	GND



**USB34**

Pin	Name
1	USBV2
2	USBV2
3	USBD2-
4	USBD3-
5	USBD2+
6	USBD3+
7	GND
8	GND
9	Null
10	GND



**PS0N1: ATX / AT Mode Selection**

Setting	Function
1-2	AT Mode
2-3*	ATX Mode

\*: Default



# Locating connectors and Jumpers

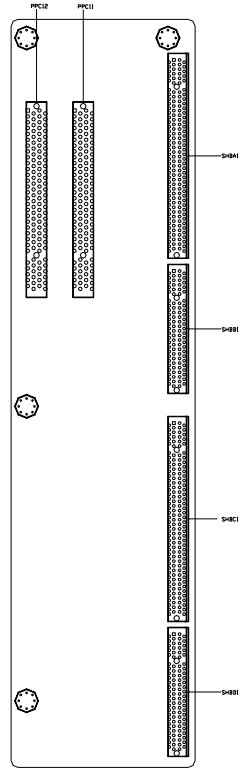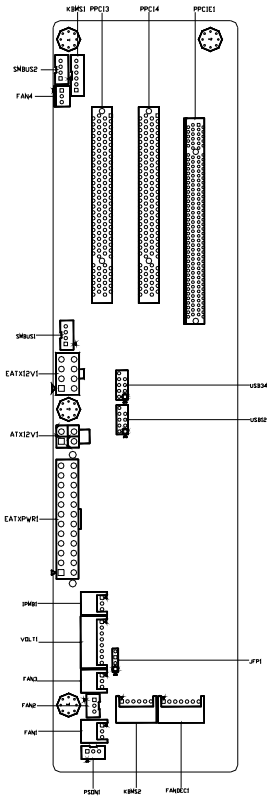


*Locating Connectors (component side)*

*Locating Connectors (solder side)*



# Board Diagram

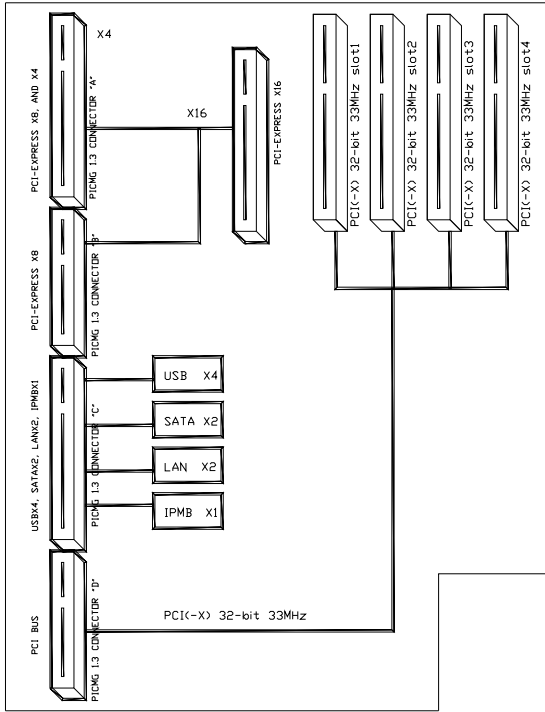

## PCI Routing Tables

### PCI 32-bit

	PCI Slot	PPCI1	PPCI2	PPCI3	PPCI4
PCI Interrupt Pin Route	IDSEL	AD 31	AD 30	AD 29	AD 28
	INT A	INT B	INT C	INT D	INT A
	INT B	INT C	INT D	INT A	INT B
	INT C	INT D	INT A	INT B	INT C
	INT D	INT A	INT B	INT C	INT D