

5VDC, 3A, 15W Power Supply

Model: BB-SDI18-5-U-P5

ADVANTECH

www.advantech.com



- + Up to 18 W continuous power
- + No-load power consumption < 0.075 W
- + Universal input voltage range
- + Over voltage, over current, and short circuit protections
- + IEC 62368-1 and 60950-1 compliant
- + DoE Level VI and CoC Tier 2 compliant
- + UL/cUL, GS, PSE safety approvals
- + Limited Power Source (LPS) rated

OVERVIEW

Model BB-SDI18-5-U-P5 is a 15W desktop AC-DC power supply with C14 inlet designed to meet US DoE Level VI efficiency standards in addition to the more stringent EU CoC Tier 2 requirements. Featuring a range of safety approvals and no-load power consumption less than 0.075 W, this desktop power adapter keeps you one step ahead of the latest power regulations


ORDERING INFORMATION

MODEL NUMBER	OUTPUT VOLTAGE (V DC)	OUTPUT CURRENT (A, max)	OUTPUT POWER (W, max)	RIPPLE & NOISE ¹ (mVp-p, max)	OUTPUT PLUG
BB-SDI18-5-U-P5	5	3	15	100	Standard DC Straight Plug

1. At full load, nominal input, 20 MHz bandwidth oscilloscope, each output terminated with 0.1 μ F multi-layer ceramic and 10 μ F low ESR electrolytic capacitors.


MECHANICAL DRAWING - POWER SUPPLY

Units = mm

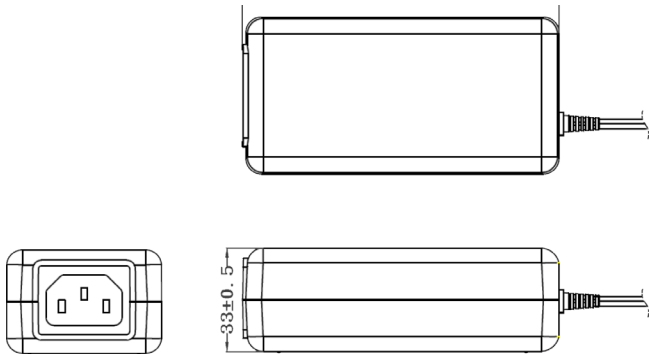

MECHANICAL DRAWING - OUTPUT PLUG

Units = mm




PLUG POLARITY

Plug Polarity:
Center Positive (-P5)



MECHANICAL DRAWING - DC CORD

Units = mm



Model No.	Cable	Cord Length
BB-SDI18-5-U-P5	UL2468, 16 AWG	1,500 mm \pm 30

All product specifications are subject to change without notice.
BB-SDI18-5-U-P5_PowerSupply_4119ds

ADVANTECH

Advantech B+B SmartWorx, 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 1 (800)346-3119/Toll Free | orders@advantech-bb.com | support@advantech-bb.com

5VDC, 3A, 15W Power Supply

Model: BB-SDI18-5-U-P5



SPECIFICATIONS

PARAMETER	CONDITIONS/DESCRIPTION	MINIMUM	TYPICAL	MAXIMUM	UNITS
POWER - INPUT					
Voltage	-	90	-	264	V AC
Frequency	-	47	-	63	Hz
Current	At full load	-	-	0.48	A
In-rush Current	At 100V AC, full load, 25 °C, cold start	-	-	50	A
	At 230V AC, full load, 25 °C, cold start	-	-	60	A
Leakage Current	-	-	-	3.5	mA
No-load Power Consumption	At 230V AC	-	-	0.075	W
POWER - OUTPUT					
Regulation	5V DC output	-	+/- 6	-	%
Hold-up Time	At full load	10	-	-	ms
PROTECTIONS					
Over-Voltage Protection	5V DC output (output shut-down)	-	-	12	V DC
Over-Current Protection	5V DC output (output shut down, auto-recovery)	-	-	7	A
Short Circuit Protection	output shut down, auto recovery	-	-	-	-
ENVIRONMENTAL					
Operating Temperature	-	0	-	40	°C
Storage Temperature	-	-20	-	80	°C
Operating Humidity	Non-condensing	20	-	80	%
Storage Humidity	Non-condensing	10	-	90	%
MECHANICAL					
Dimensions	100 x 50 x 33	-	-	-	mm
AC Inlet Plug Type	IEC320/C14	-	-	-	-
Weight	Without AC cord	-	170	-	g
SAFETY					
Isolation Voltage	Input to output at 10 mA for 1 minute.	-	3,000	-	V AC
	Input to frame ground at 10 mA for 1 minute.	-	1,500	-	V AC
Isolation Resistance	Input to output at 500V DC	10	-	-	MΩ
APPROVALS / CERTIFICATIONS					
Safety Approvals	UL/cUL, GS, PSE	-	-	-	-
EMI/EMC	FCC Part 15B Class B, CE	-	-	-	-
MTBF	As per Telcordia SR-332, 25 °C	300,000	-	-	hours
RoHS	2011/65/EU	-	-	-	-