


# ASMB-975

**Dual LGA 3647-P0 Intel® Xeon® Scalable Proprietary Server Board with 12 DDR4, 4 PCIe x16 + 1 PCIe x8+4 PCIe x4, 14 SATA3, 8 USB3.0, Dual 10GbE, IPMI**

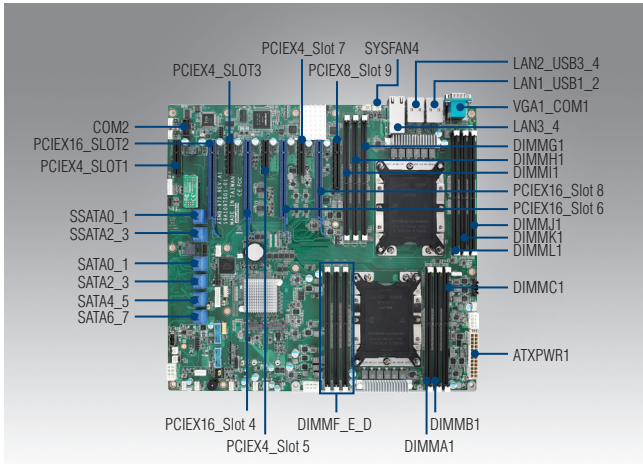


## Features

- Proprietary server board with dual Xeon® Scalable processors
- DDR4 2933MHz RDIMM up to 1.5TB, support Apache Pass
- 14 SATA3 connectors (including 2 SATA M.2 2242)
- Four PCIe x16 slots (Gen3) for double-deck cards
- Intel® X557-AT2 dual 10GbE ports
- 0 ~ 40 °C ambient operating temperature range

## Specifications

Form Factor		Proprietary (14.1" x 13")
Processor System	Socket	Intel LGA 3647-P0
	CPU type	Intel Xeon 1st and 2nd Gen Scalable dual processors (CPU cooler should be purchased separately and TDP up to 205W)
Core Logic	Chipset	Intel C621/C622 chipset
Memory	Total slots	12 (1 DIMM per channel)
	Capacity	Maximum 1.5TB ECC LRDIMM Maximum 1.5TB ECC 3DS RDIMM Maximum 2TB Intel Optane DC Persistent Memory in memory mode
	Memory type	DDR4 2133/2400/2666/2933MHz RDIMM, LRDIMM
	Memory size	4GB, 8GB, 16GB, 32GB, 64GB, 128GB
Expansion Slots	Total PCIe slots	9
	Slot location 1	PCIe x4 slot (x4 link), signal from CPU1
	Slot location 2	PCIe x16 slot (x16 link), signal from CPU0
	Slot location 3	PCIe x4 slot (x4 link), signal from CPU1
	Slot location 4	PCIe x16 slot (x16 link), signal from CPU1
	Slot location 5	PCIe x4 slot (x4 link), signal from CPU0
	Slot location 6	PCIe x16 slot (x16 link), signal from CPU1
	Slot location 7	PCIe x4 slot (x4 link), signal from CPU0
	Slot location 8	PCIe x16 slot (x16 link), signal from CPU0
Slot location 9	PCIe x8 slot (x8 link), signal from CPU1	
Graphics	VGA	Aspeed AST 2500/2510
Storage	SATA controller	Intel C621/C622: 12 x SATA3 (600 MB/s) support software RAID 0,1,5,10
	SAS controller	-
Networking	GbE/10GbE LAN	2 x Intel I210AT / Intel X557-AT2 (dual 10GbE ports)
Onboard I/O Connector	PSU connector	24-pin SSI power connector + 2 x 8-pin SSI 12 V power connector + 4-pin SSI 12 V power connector
	USB connector	2 x USB2.0 ports (two onboard headers) + 4 x USB3.0 ports (two onboard headers) + 1 x Type-A USB2.0 port
	Fan header	8 (6 for system fan + 2 for CPU fan)
	M.2	2 x M.2 2242 M key (SATA)
	SMBus	1
	Chassis intruder	1
	Front LAN LED	2
	Audio Header	1
Rear I/O Connector	PS/2 Keyboard/Mouse header	1
	Serial port header	1
	External serial port	1
	External USB port	4 (USB3.0)
	VGA port	1
	RJ-45	4 (LAN2 and LAN4 shared with BMC)
Management Solution	PS/2 Keyboard/Mouse	-
	Infiniband	-
Monitoring	Software	-
	Out of band remote management	Yes (ASMB-975I/ASMB-975T2)
Watchdog Timer	CPU temperature	Yes
	System Monitoring	Yes
Power Requirement	Output	System reset
	Interval	Programmable 1 ~ 255 sec/min
Environment	Power On	3.3V 5V 12V 5Vsb -12V 8P_0 8P_1
	(205W CPU@2.5GHz DDR4 2400 8G*12)	1.37A 6.83A 0.09A 0.14A 0.03A 20.11A 20.52A
Physical Characteristics	Operating	Non-operating
	Temperature	0 ~ 40 °C, depends on CPU speed and cooler solution
	Humidity	10% ~ 95%
	Dimension (L x H)	358.1 x 330.2 mm (14.1" x 13")

### Block Diagram

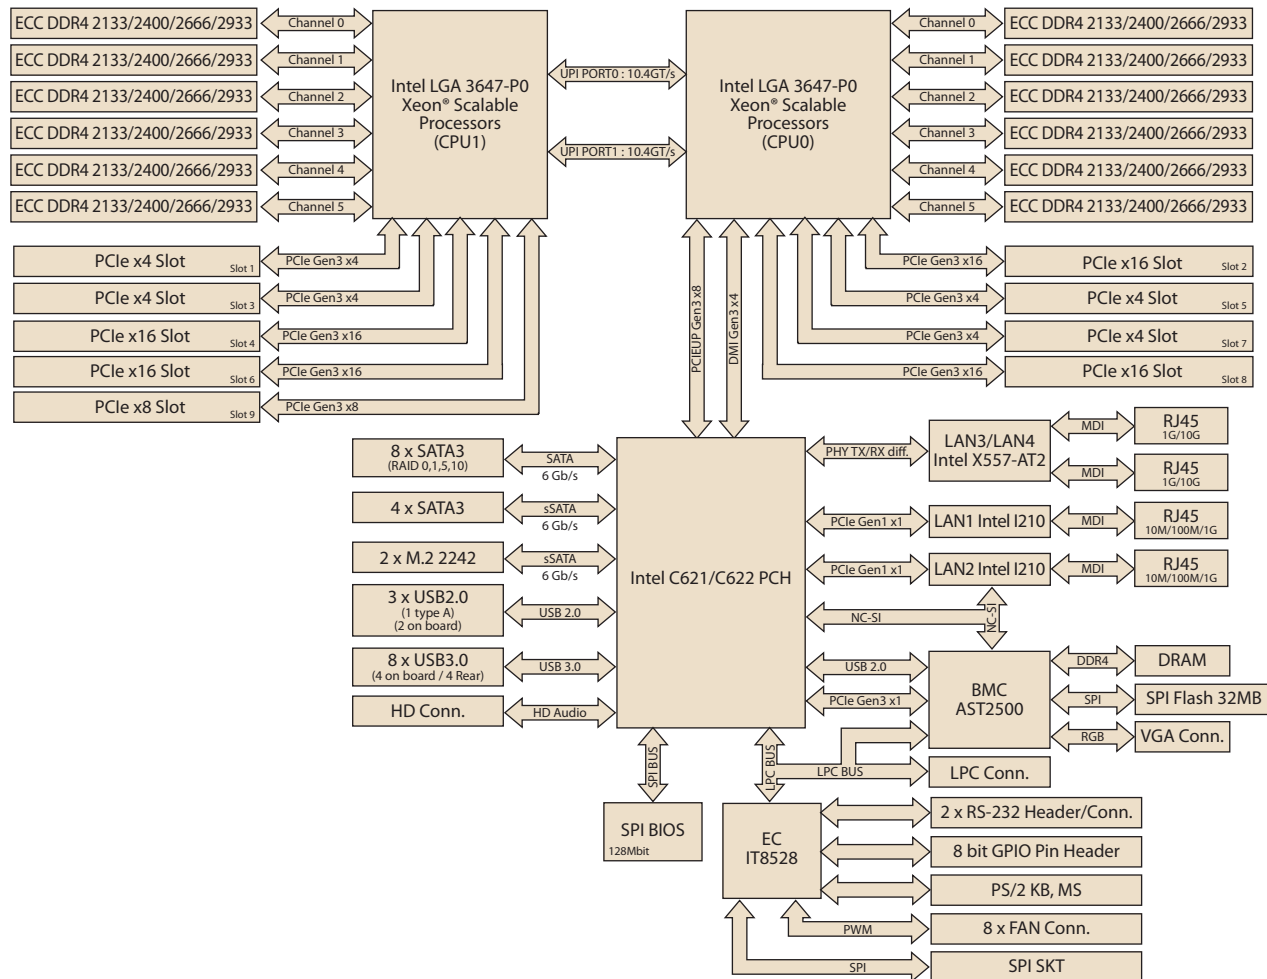

### Ordering Information

Part Number	Chipset	Memory	GbE/10GbE LAN	IPMI	Graphics
ASMB-975-00A1	C621	12 x DDR4 RDIMM/LRDIMM	2/-	-	AST 2510
ASMB-975I-00A1	C621	12 x DDR4 RDIMM/LRDIMM	2/-	Yes	AST 2500
ASMB-975T2-00A1	C622	12 x DDR4 RDIMM/LRDIMM	2/2	Yes	AST 2500

### Packing List

Part Number	Description	Quantity
2066975100	Driver CD	x 1
2001097500	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
1700019748	CPU power cable	x 2
1930008089	Screw for M.2 device	x 3
1960076488T000	I/O shield	x 1
1651003167-01	LGA3647 CPU clip	x 2

### Optional Accessories

Part Number	Description
PCA-AUDIO-HDB1E	HD audio card
PCA-TPM-00B1E	TPM 2.0 module
1960081155N001	LGA-3647 narrow CPU heatsink for 1U chassis (85W)
1960088272T001	LGA-3647 narrow CPU cooler for 2U/4U chassis (150W)
1960081603N101	LGA-3647 narrow CPU cooler for 4U chassis (205W)
1700028025-01	Dual port USB cable (45 cm) with bracket
1700028042-01	Four port USB cable (45 cm) with bracket
1700028024-01	Dual port USB 3.0 cable (45 cm) with bracket
1701090401	COM port cable with bracket

Note: PCA-AUDIO-HDB1E is not compatible with Advantech 3U chassis.

### I/O View



ASMB-975-00A1  
ASMB-975I-00A1



ASMB-975T2-00A1